# HIGH RESOLUTION, INDOOR/OUTDOOR, DAY/NIGHT COLOR SURVEILLANCE CAMERA

## FEATURES

- Advanced Image Sensor (AIS) produces High Resolution video (480 TV Lines)
- IR Cut Filter provides accurate color reproduction in all lighting conditions
- 30 High Intensity IR LEDs provide effective night vision range up to 75 ft. (23 m)*
- 5.1mm Pure Flat lens eliminates image distortion
- Day/Night mode: Picture automatically switches to B&W delivering better clarity in low light conditions
- Weatherproof cameras ideal for indoor and outdoor applications (IP66)**
- A single 4-in-1 power adaptor provides power to all 4 cameras
- Versatile stand provides flexible mounting options: ceiling, counter or wall mountable

## AIS IMAGE SENSOR + EXCLUSIVE INFRARED FILTER TECHNOLOGY

Accurate color reproduction in varying lighting conditions

## PURE FLAT™ LENS

Eliminates image curving for an undistorted view

## ANTI-GLARE TECHNOLOGY

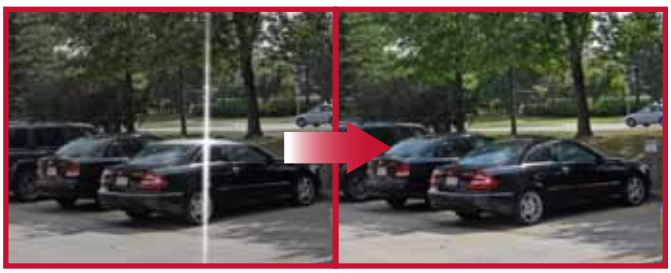

Clear images under strong lighting conditions

* Night vision range up to 75 ft. (23 m) in ideal conditions. Objects at or beyond this range may be partially or completely obscured, depending on the camera application.
**Not intended for submersion in water. Installation in a sheltered location recommended.

LOREX®
CONNECT. PROTECT.

# HIGH RESOLUTION, INDOOR/OUTDOOR, DAY/NIGHT COLOR SURVEILLANCE CAMERA

## SPECIFICATIONS

| | |
|---|---|
| **Image Sensor:** | 1/4" Advanced Color |
| **Video Format / Pixels:** | NTSC: 656(H) x 492 (V) |
| **Horizontal Resolution:** | 480 TVL |
| **Sync. & Scan. Systems:** | Internal; 2:1 Interlace |
| **S/N Ratio:** | → 48dB |
| **Iris & Shutter Speed:** | AES; 1/60 - 1/50,000 sec. |
| **Minimum Illumination:** | 0.6 LUX @ F1.2 (IR off) |
| | 0 LUX (IR LEDs on) |
| **Video Output:** | Comp. 1.0 Vpp @75 ohm |
| **Lens / Lens Mount:** | 5.0mm F2.8/Fixed |
| **FOV (diagonal):** | 50 Degrees |
| **Termination:** | Video: BNC Female |
| | Power: Barrel Female |
| **IR/Night Vision Range:** | 30 IR LEDs/850nm/75" (23m) |
| **Power Requirement:** | 12V DC ± 10% |
| **Power Consumption:** | 220 mA or 3W max |
| **Operating Temp.:** | 14°F ~ 122°F |
| | (-10°C ~ 50°C) |
| **Weight (with stand):** | 0.66 lb / 0.3 kg |
| **Dimensions (W x D x H):** | 3" x 5.1" x 5.1" |
| **(with sunshade)** | 75 mm x 130 mm x 129 mm |

## DIMENSIONS

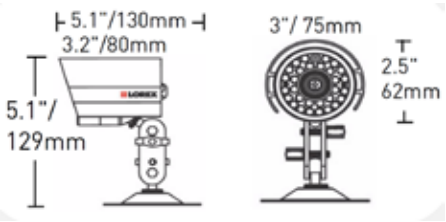


## CAMERA MOUNTING OPTIONS

WALL MOUNT

CEILING MOUNT

COUNTER MOUNT

## PRODUCT INFORMATION

### CVC6996PK4 Giftbox with Retail Sleeve

| | |
|---|---|
| UPC: | 7-78597-69960-9 |
| Package Weight: | 3.4 kg / 7.6 lbs |
| Package Dimensions: (W x D x H) | 315mm x 140mm x 295mm 12.4" x 5.5" x 11.6" |
| Package Cube: | 0.013m / 0.459' |

### CVC6996PK4B White Box

| | |
|---|---|
| UPC: | 7-78597-69961-6 |
| Package Weight: | 3.4 kg / 7.6 lbs |
| Package Dimensions: (W x D x H) | 315mm x 140mm x 295mm 12.4" x 5.5" x 11.6" |
| Package Cube: | 0.013m / 0.459' |

## CONTENTS

| | |
|---|---|
| CVC6996PK4/ CVC6996PK4B | 4 x Cameras with stands, 4 x 60' (18 m) BNC Extension Cables, 1 x 4-in-1 Power Adapter |

**Lorex Technology Inc.**

250 Royal Crest Court, Markham, Ontario L3R 3S1, Canada.

3700 Koppers Street Baltimore, Maryland 21227, USA.

©2011 Lorex Technology Inc.
As our product is subject to continuous improvement, Lorex Technology & subsidiaries reserve the right to modify product design, specifications & prices without notice and without incurring any obligation. E&OE